





SPINETIX

DiVA

All-in-One Digital Signage.

Create. Schedule.

Built-in web-based tools with
ready to use Playouts and Apps
for a single horizontal or vertical screen.

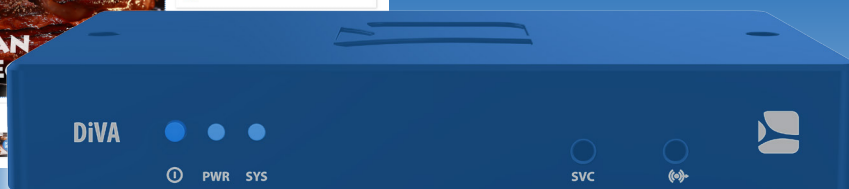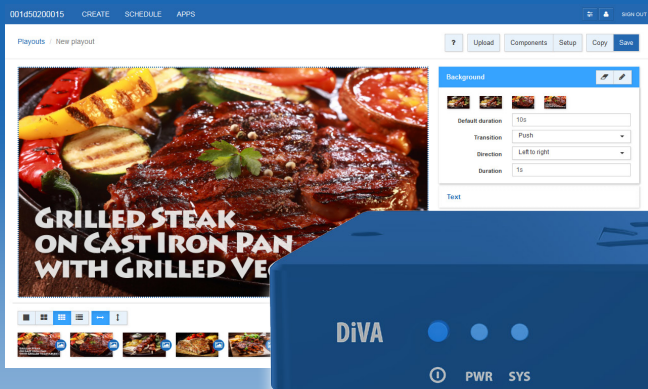

Tech Specs



Connectors & Ports

| | |
|---------------------|--|
| Video | HDMI |
| Audio | Line level, stereo |
| USB port | 2x USB 2.0 |
| Network | Ethernet 1GbE, IEEE 802.3ab, IEEE 802.3u, IEEE 802.3az |
| Power Supply | Input: 100-240V, 50-60Hz Output: 5V DC 3.6A max. |

Size & Weight

| | |
|---------------|--|
| Size | Width: 5.9" / 150mm Height: 0.9" / 23mm Depth: 3.4" / 86.5mm |
| Weight | 12.3oz / 350g |

Player Engine

| | |
|--------------------------|---|
| Layer composition | Background plus non-overlapping zones |
| Animation | Built-in playouts, apps |
| Text | Unicode support (international text) Bidirectional (right-to-left, left-to-right) |
| Fonts | Built-in fonts (Western, Cyrillic, Arabic, Greek, Hebrew, Chinese, Japanese, Korean, Thai, Hindi, etc.) |

Formats

| | |
|---------------------------|---|
| Images | JPEG, PNG |
| Media file formats | MPG, MP4, M4A, MOV, WMV |
| Video codecs | Multi-video decoding capable, 1080p max H.264/MPEG-4 AVC: HP@L4 MPEG-2: MP@HL MPEG-4: ASP WM9/VC-1: AP@L3 |
| Audio codecs | AAC-LC, HE-AAC MPEG Layer I, II, III (MP3) WMAv2 AC3 |
| Data feeds | Built-in RSS app |

Display

| | |
|---------------------|--|
| Aspect ratio | 16:9 Horizontal, vertical |
| Resolution | 1080p (1920x1080), 720p (1280x720) at 50/60 Hz |
| Power on/off | DVI, HDMI-CEC |

Network

| | |
|-----------------------------|--|
| Protocols | DHCP, static IP, Zeroconf IPv4, IPv6 Bonjour HTTP |
| Remote configuration | Built-in HTTP server, RPC |
| Content transfer | Web browser upload |

Storage

| | |
|-----------------|--------------------------------------|
| Internal | 8GB solid state |
| External | Flash drive, hard disk (via USB 2.0) |

Characteristics

| | |
|------------------------------|--|
| Processor | DaVinci DM8148 (ARM Cortex-A8 Core 1GHz) |
| Memory | RAM: 1 GB, DDR3-1066 Bandwidth: 4.3GB/s |
| Power consumption | 8W |
| Operating conditions | Ambient temperature 32 - 104°F / 0 - 40°C Relative humidity 10-90% noncondensing Altitude 10,000ft / 3,000m max. |
| Storage temperature | -4 - 122°F / -20 - 50°C |
| Real-time clock (RTC) | Accuracy ±1 min./month Backup by supercap (40 days) |

Tools

Built-in web-based content creation and scheduling tools

Warranty

3 Year Limited Hardware Warranty